

# Ku-Band Low Noise Amplifiers

## LK-12000 Series



LK-12000 series Ku-Band Ultra Low Noise Amplifiers are specially designed for satellite earth station and other telecommunications applications. Utilizing state-of-the-art HEMT and GaAs FET technology, these amplifiers have been designed for both fixed and transportable applications. High performance models are available with noise temperatures of 90 K, 80 K, 70 K, or 65 K. Noise temperature specifications are guaranteed over the full bandwidth of the LNA and are verified by cold load testing.

### Features


- Noise temperatures to 65 K
- High reliability HEMT design
- Input/output isolators
- Reverse polarity protection
- Wide operating temperature range, -40 °C to +70 °C
- Form 'C' alarm
- CE certified, RoHS compliant

### Options

- Low gain, 50 dB
- High output power, +20 dBm
- Type N (F) RF output connector
- Universal input AC power supply

Noise  
Temperature  
(K)

**LK-12000 Series Typical Noise vs. Frequency**

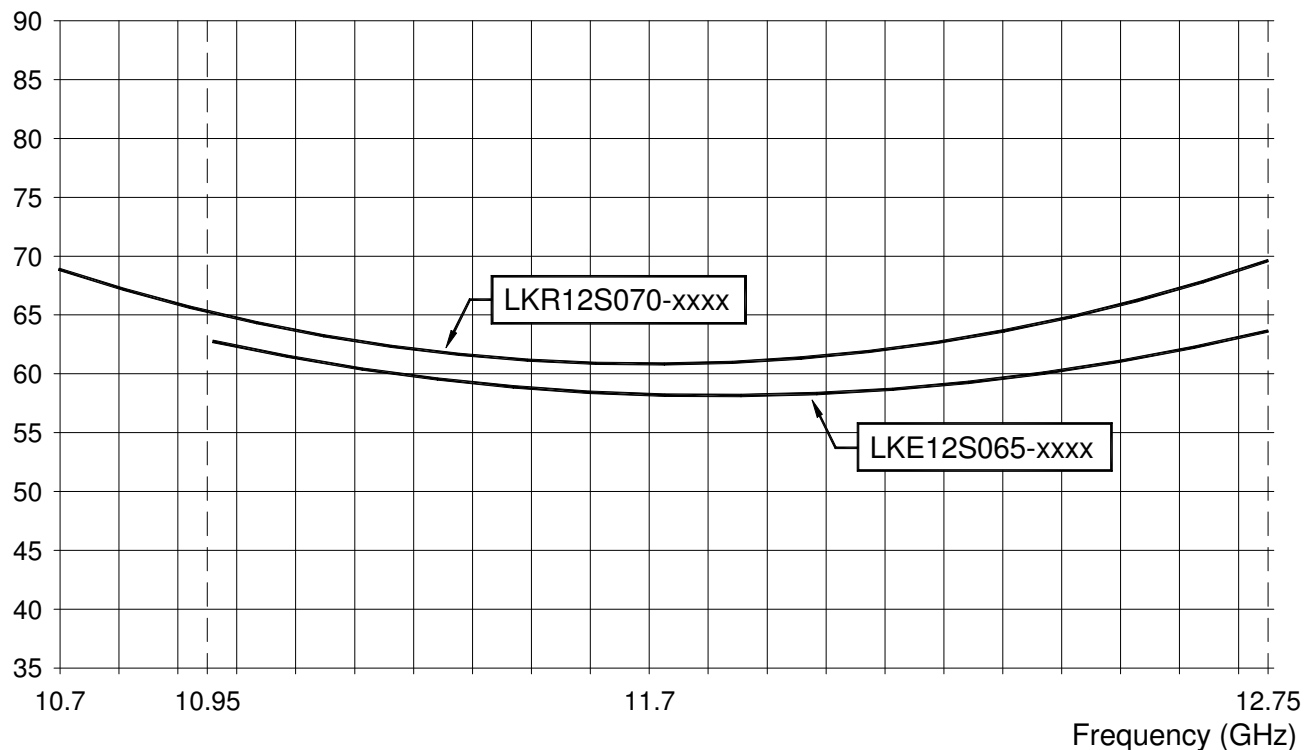

Parameter	Notes	Min.	Nom./Typ. <sup>†</sup>	Max.	Units
Frequency	Band "E" Band "R"	10.95 10.70		12.75 12.75	GHz GHz
Gain	Standard Option 1	60 50	64 53	66 56	dB dB
Gain Flatness	Full band Per 40 MHz			±0.5 ±0.2	dB dB
VSWR	Input Output		1.20 1.20	1.25 1.50	:1 :1
Noise Temperature <sup>A</sup>	At +23 °C Versus temperature		See Table 2	See Table 1	
Power Output at 1 dB compression	Standard Option 2	+12 +20	+15 +22		dBm dBm
3rd Order Output Intercept Point	Standard Option 2	+22 +30	+25 +32		dBm dBm
Group Delay per 40 MHz	Linear Parabolic Ripple			0.01 0.001 0.1	ns/MHz ns/MHz <sup>2</sup> ns p-p
AM/PM Conversion	-5 dBm Output			0.05	%dB
Gain Stability (Constant Temp.)	Short term (10 min) Medium term (24 hrs) Long term (1 week)			±0.1 ±0.2 ±0.5	dB dB dB
Gain Stability	Versus temperature		-0.04		dB per °C
Maximum Input Power	Damage threshold Desens. threshold, 13.75–14.50 GHz			0 -20	dBm dBm
Connectors	Input Output, standard Output, Option 7 Power, standard <sup>B</sup>		WR75 Cover Flange SMA Female Type N Female PT02E10-6P-027 (mate supplied)		
Power Requirements	Voltage Current, standard Current, Option 2	12	15 140 270	24 210 330	V mA mA
Operating Temperature	T <sub>AMB</sub>	-40		+70	°C
MTBF (MIL-HDBK-217F)	Ground fixed, +40 °C		130,000		hours

<sup>†</sup> When there is only one value on a line, the Nom./Typ. column is a nominal value; otherwise it is a typical value. Typical values are intended to illustrate typical performance, but are not guaranteed.

<sup>A</sup> Maximum Noise temperature at +23 °C at any frequency in the specified band.

<sup>B</sup> DC power may be supplied either via the RF output connector (cable powered) or via the MS-type connector.

**Table 1 – Part Number/Ordering Information**

	<b>LK</b>	<b>12S</b>	-				
<b>Frequency Range</b>							
10.95–12.75 GHz.....		E					
10.70–12.75 GHz.....		R					
<b>Noise Temperature</b>							
90 K .....						90	
80 K .....						80	
70 K .....						70	
65 K .....						65	
<b>Gain</b>							
60 dB minimum .....						X	
50 dB minimum .....						1	
<b>Output Power</b>							
+12 dBm .....						X	
+20 dBm .....						2	
<b>Power Configuration</b>							
+12 to +24 Vdc.....						X	
90-265 Vac, 47-63 Hz.....						4	
<b>RF Out Connector</b>							
SMA Female .....						X	
Type N Female .....						7	

**Table 2 – Noise Temperature vs. Ambient Temperature**

Noise temperature vs. ambient temperature can be found from the equation,

$$NT_2/NT_1 = (T_2/T_1)^{1.8}$$

where:

- NT<sub>2</sub> = Noise Temperature at T<sub>2</sub>
- NT<sub>1</sub> = Noise Temperature at T<sub>1</sub>
- T<sub>2</sub> = Temperature 2 in K
- T<sub>1</sub> = Temperature 1 in K  
(K = °C + 273)


For the case where T<sub>1</sub> = 296 K (+23 °C), the ratio NT<sub>2</sub> / NT<sub>1</sub> is shown in the table below:

Ambient Temperature T <sub>2</sub> (°C)	Ratio NT <sub>2</sub> / NT <sub>1</sub>
0	0.86
+23	1.00
+40	1.11
+50	1.17
+60	1.24


Example: For model LKE12S90-XXXX, NT<sub>1</sub> = 90 K at +23 °C; what is NT<sub>2</sub> at +50 °C?  
From the table, NT<sub>2</sub> / NT<sub>1</sub> at 50 °C = 1.17: NT<sub>2</sub> = 1.17 x (90 K) = 105 K at 50 °C

**Typical Applications**


**1:1 Redundant Systems**

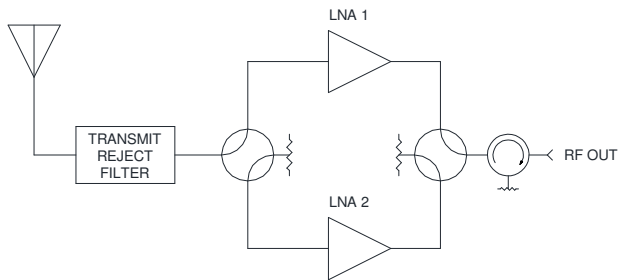


**1:2 Redundant Systems**

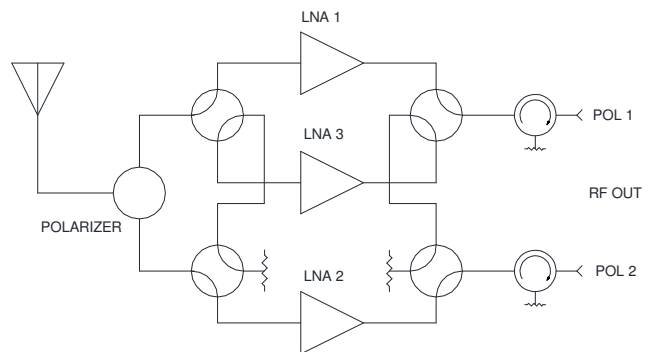

### Outline Drawing, Standard LNA

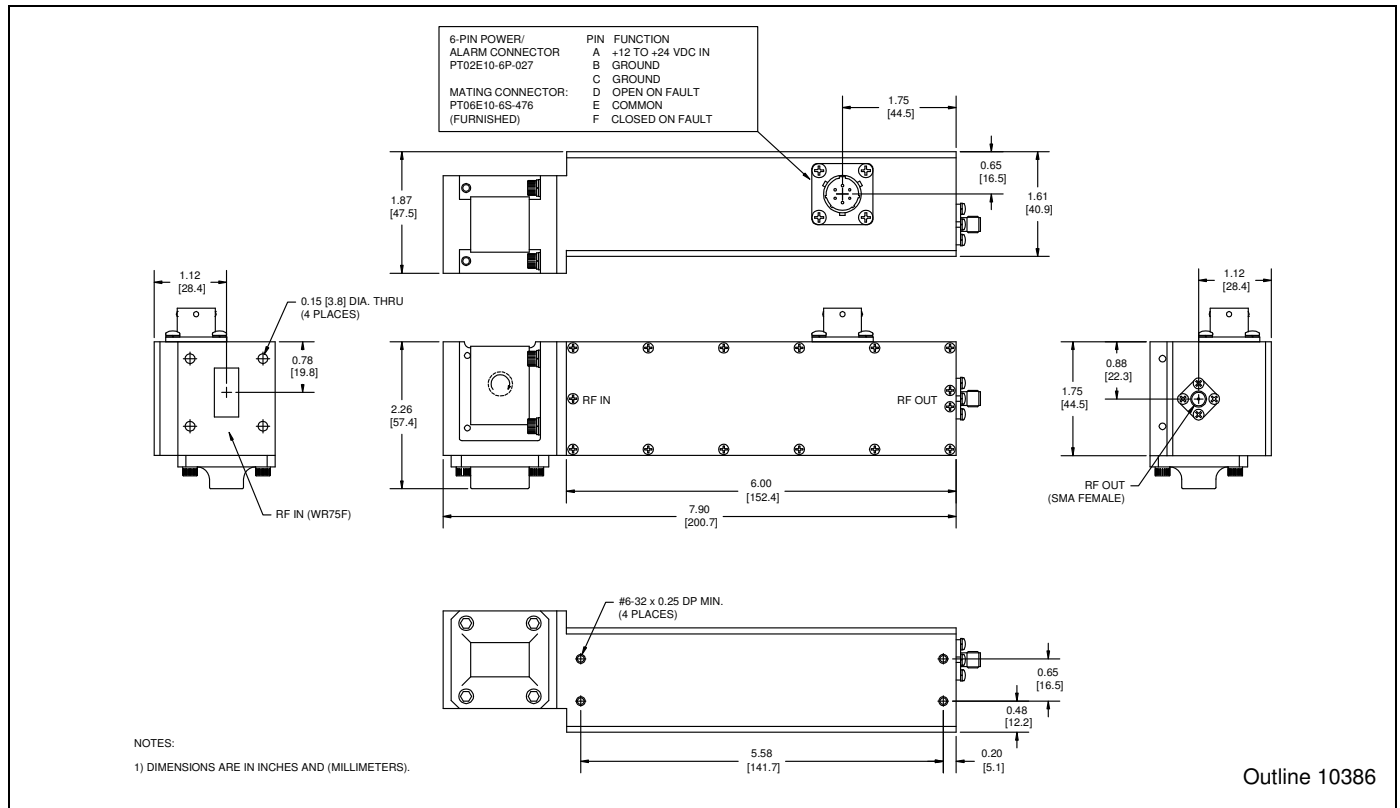

### Outline Drawing, LNA with AC Power Supply

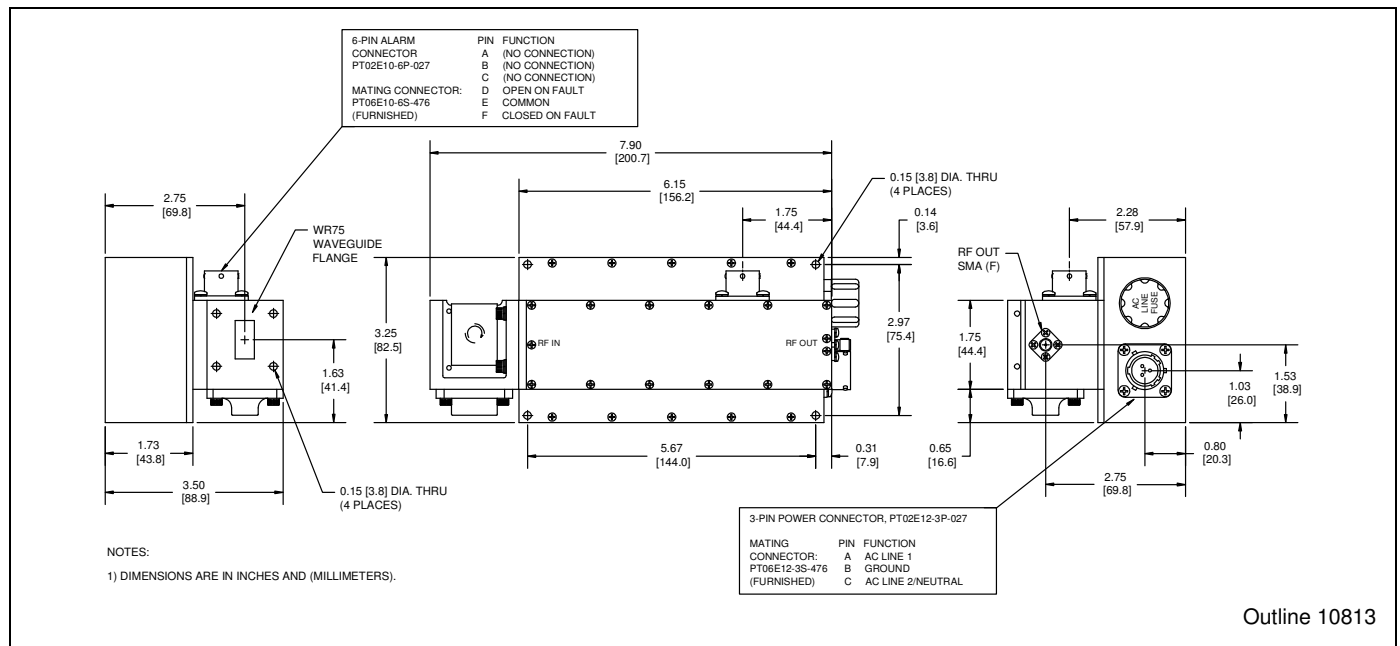

## GENERAL DYNAMICS SATCOM Technologies

60 Decibel Road, Suite 200 • State College, PA 16801 USA • Tel. +1-814-238-2700 • FAX +1-814-238-6589  
Email: [satcom@gd-ms.com](mailto:satcom@gd-ms.com) • [www.gdsatcom.com/electronics.php](http://www.gdsatcom.com/electronics.php)

5908 Rev. K

© 2015 General Dynamics. All rights reserved. General Dynamics reserves the right to make changes to its products and specifications at any time and without notice. All trademarks indicated as such herein are trademarks of General Dynamics. All other product and service names are the property of their respective owners.