

# PCIe Card Decimator D4 Spectrum & Signal Analyzer

*Ideal for integration into small spaces.*

The Decimator D4 Spectrum & Signal Analyzer is a fourth generation spectrum measurement and analysis card, providing high-end performance at a low price. It can function as either an independent spectrum analyzer in a satellite, cable or terrestrial network or can easily be integrated into a satellite terminal, equipment enclosure or as part of a larger measurement network.

Decimator D4 uses state of the art digital technology and Fast Fourier Transformations to make fast and accurate measurements.


With a very low noise floor and large dynamic range, it is well-suited to measure any type satellite, cable or terrestrial wireless carrier, including very small carriers, beacon signals and for carrier monitoring applications. Decimator accepts all signals from 5 MHz to 6.5 GHz and input power levels ranging from  $-110$  to  $+5$  dBm. RBW varies from 1 Hz to 15 MHz. The Decimator can be connected to an external 10 MHz reference for improved frequency accuracy and stability. All data communications with the Decimator occurs via the built-in Ethernet port.

The signal analysis engine demodulates and decodes the MPEG transport stream based DVB-S/S2/S2X signal and provides signal characteristics, modulation accuracy, power measurements, and constellation display to view the digital modulation quality.

The card measures only 4.2" x 6.875" x 0.8" and is ideal for integration into small spaces. It can be installed in any enclosure or computer chassis. It is a half size PCI express (PCIe) card and can be installed in an available computer PCIe slot, providing power to the card. Alternatively, it can be mounted on standoffs and powered through a 3-pin Molex connector (12 and 3.3 to 5 Vdc) for integration into any enclosure.

The HTML5-based user interface allows the D4 to be operated from all browsers and on all platforms including Android and IOS devices. No additional software is required. The GUI is very easy to use and operates like most traditional spectrum analyzers. It provides user-selectable colors for markers and traces, allows storage of multiple traces and provides measurement reporting. The Decimator GUI also includes a powerful built-in Carrier Monitoring function, which provides notification via email or SNMP of carrier measurements that exceed user-defined limits, offering you peace of mind that up to 100 of your carriers are operating as expected.

Decimator has a publically available API for integration into third-party Network Monitoring Systems.

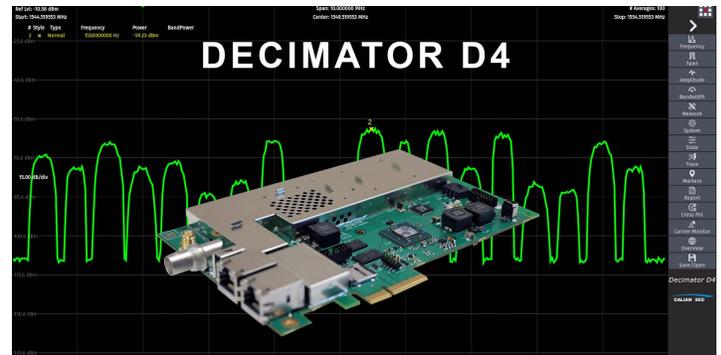

# PCIe Card D4 Specifications

## Overview

- Full satellite L-band, standard C band, plus cable & wireless bands from 5 MHz to 6.5 GHz
- Built-in Carrier Monitoring
- External 10 MHz reference or internal reference
- Web browser or API control
- SNMP status interface
- Installs in half size PCIe slot or equipment enclosure
- Custom design versions supporting other frequency bands or form factors available upon request

**Option:** Available at time of order or later via license key

## Spectator Software

Enhanced Carrier Monitoring for a single Decimator

## Physical Interfaces

RF inputs:	SMA, 50 ohms
Control:	RJ-45
Reference:	SMA, 50 ohms
Power:	PCIe or 3-pin Molex connector
Mechanical:	Half size PCIe card 4.2" x 6.875" x 0.8"

## Measurement Speed<sup>3</sup>

500 MHz span, 1 MHz RBW, 200 ms
200 MHz span, 30 kHz RBW, 630 ms
80 MHz span, 100 kHz RBW, 170 ms
3.5 MHz span, 8 kHz RBW, 90 ms

## Notes

1. Measurement conditions: 10 averages, input level between -8 dBm and -68 dBm, 3 sigma.
2. Resolution bandwidths auto or manual adjustable.
3. Expected rates with 10 averages, speed optimization.
4. All specification at 25°C unless otherwise noted and are subject to change.
5. Specifications are stated for performance up to 3 GHz.

## RF Input

Input Frequency Range:	5 MHz to 6.5 GHz
Useable Dynamic Range:	-110 to +5 dBm (aggregate)
Noise Floor:	-160 dBm/Hz typical at min atten -140 dBm/Hz typical at max atten
Phase Noise: (worst case at 3 GHz)	-80 dBc/Hz at 1 kHz offset -95 dBc/Hz at 100 kHz offset -125 dBc/Hz at 1 MHz offset
Maximum Safe Input:	+15 dBm

## Measurements

Amplitude Accuracy:	± 0.5 dB (at 25°C) <sup>1</sup> ± 1.0 dB (0 to 55°C)
Frequency Accuracy:	± 2.6 ppm (internal) or as per external reference
Frequency Resolution:	1 Hz
Resolution Bandwidth:	1 Hz to 15 MHz

Analysis Bandwidth: up to 260 MHz

Spurious:	
- Images:	< -55 dBc (typical)
- Aliasing:	< -55 dBc (typical)
- DC Offset:	< -30 dBc (typical)
Averaging:	up to 255 averages

## Other Specifications

Reference Input:	10 MHz, -5 dBm to +13 dBm, +3 dBm to +13 dBm (auto-sensing)
Control Interface:	TCP/IP API, SNMP, HTTPS
Power Requirements:	PCIe or 12/3.3 to 5 Vdc, 18W max.
Operational Temperature Range:	0 to 55°C

## Modes of Operation

Raw Snapshot Mode: # of IQ time samples approx.	192 million
Linear Power/Bin (4096 samples, up to 255 averages)	
Log Power/Bin (4096 samples, up to 255 averages)	
Raw IQ Samples - Fractional decimation supported	
Selectable Spectral Inversion	
Programmatic measurement & control over Ethernet based API	

## To learn more, please contact:

Jim Shedden - Sales Manager  
T: 306-933-1541  
E: [decimator@sedsystems.ca](mailto:decimator@sedsystems.ca)