


## 950mp Integrated Satellite Router Board

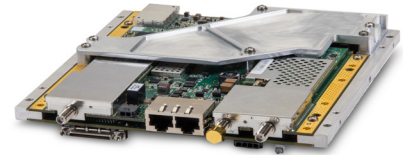

### Network Configuration

<b>Compatibility</b>	Evolution® and iDirect Velocity™ compatible		
<b>Network Topology</b>	DVB-S2 with Adaptive TDMA Returns		
	<b>Downstream</b>	<b>Upstream</b>	
	DVB-S2/ACM	A-TDMA	
<b>Modulation</b>	QPSK, 8PSK, 16APSK, 32APSK		BPSK, QPSK, 8PSK
<b>FEC</b>	LDPC 1/4-8/9		2D 16-State 1/2-6/7
<b>Maximum Rates</b>	Symbol	45 Msps	29 Msps
	<i>Maximum downstream and upstream data rates cannot be achieved simultaneously Maximum rates are achieved with optimal configurations</i>		
<b>Spread Spectrum</b>	Spreading Factor	2, 4 and 8	
	Max Chip Rate	29 Mcps	

### Interfaces

<b>SATCOM Interfaces</b>	Tx: SMA, 950-2400 MHz, +5dBm/-35dBm, 50Ω Rx: SMA, 950-2150 MHz, -5dBm (max) composite/ -130+10*log (Sym rate) dBm (min) single carrier, 50Ω Rx Reference Port (Out): SMA, 50Ω Software controllable 10/50 MHz reference on Tx and Rx Reference Port Out
<b>Available BUC Power (IFL)</b>	+24V, 2A max available @ connector
<b>Available LNB Power (IFL)</b>	Rx: 13-19V @ 0.45A
<b>Data Interfaces</b>	LAN: Dual 10/100/1000 Mbps Ethernet
<b>I/O</b>	RS-232 Console RS-232 Serial NMEA GPS input RS-422 Keyline RS-422 BUC control RS-422 Filter Select
<b>Protocols Supported</b>	TCP, UDP, ICMP, IGMP, RIPv2, Static Routes, NAT, DHCP, DHCP Helper, Local DNS Caching, OpenAMIP, OpenBMIP, cRTP
<b>Security</b>	TRANSEC module (E0002268), AES Link Encryption (256-bit)*, X.509 Digital Certificates, Automatic Key Management, CSIR, SHIELD
<b>Traffic Engineering</b>	Group QoS, QoS (Priority Queuing and CBWFQ), Strict Priority Queuing, Application Based QoS, Minimum CIR, CIR (Static and Dynamic), Rate Limiting
<b>Other Features</b>	Built-in Automatic Uplink Power, Frequency and Timing Control, Authentication, Supports Multiprotocol Encapsulation (MPE), Low-Speed COTM, 22 kHz DiSEqC tone

### Mechanical/Environmental

<b>Size</b>	W 6.6 in x D 7.0 in x H 1.25 in (W 16.76 cm x D 17.78 cm x H 3.175 cm)
<b>Weight</b>	1.45 lbs (0.65 kg)
<b>Temperature</b>	Operational: -40° to +140°F (-40° to +60°C); Storage: -40° to +176°F (-40° to +80°C)
<b>Altitude</b>	Operational: Up to 15,000 ft (4,572m); Storage: Up to 40,000 ft (12,192m)
<b>Humidity</b>	95% non-condensing humidity
<b>Input Voltage</b>	12-24VDC
<b>Power Consumption</b>	< 20W
<b>Certifications</b>	WGS Certification Pending FIPS 140-2 Level 3 (#3056) - TRANSEC Module
<b>Compliance</b>	Designed to meet MIL-STD 810G RoHS

Unless otherwise specified, the information given above is for the Evolution platform and is software dependent. The activation of some features may require a license or subscription. Integrators are responsible for certifications at the terminal level. For more information, please contact your sales representative.

\*Applies to iDirect Velocity only and is software dependent